



MARK

REVISION RECORD

VERSION





REVISERE



修改D值, min值由9.50改为9.80, max值由10.05改为10.00; 修改E1值, min值由3.85改为3.80; 修改b值, min值由0.33改为0.39; 修改b1值, min值由0.32改为0.38



C

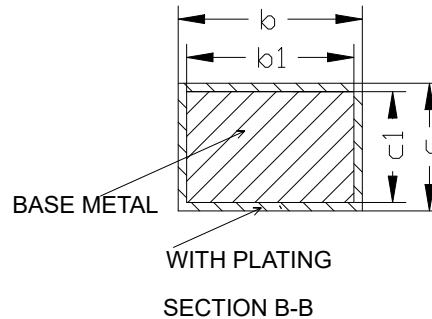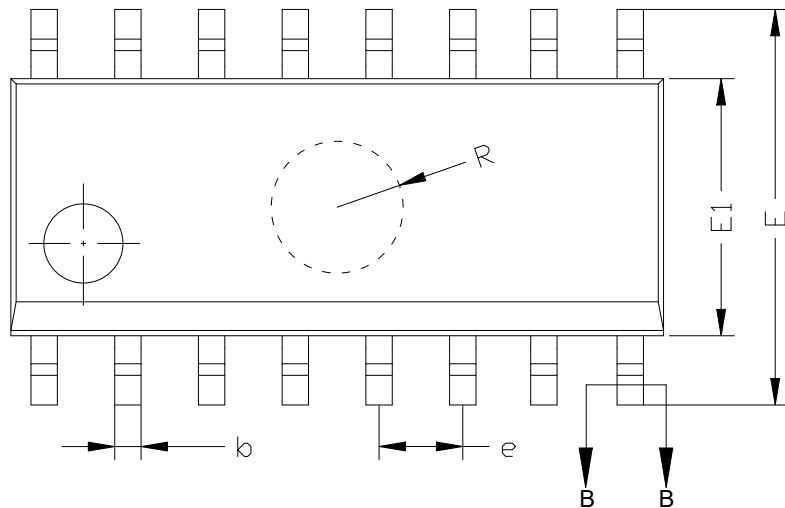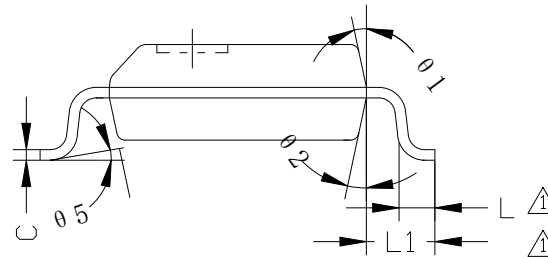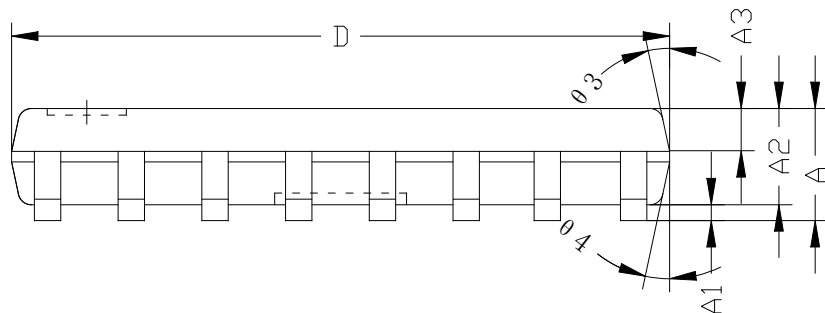

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
L			
A	--	--	1.70
A1	0.10	0.15	0.21
A2	1.40	1.45	1.50
A3	0.60	0.65	0.70
b	0.39	--	0.47
b1	0.38	0.41	0.44
c	0.20	--	0.24
c1	0.19	0.20	0.21
D	9.80	9.90	10.00
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e	1.27(BSC)		
L	0.50	0.60	0.70
L1	1.10(BSC)		
theta 1	8°	~	15°
theta 2	8°	~	15°
theta 3	8°	~	15°
theta 4	8°	~	15°
theta 5	0°	~	6°
R	0.95	1.00	1.05

技术说明:

- LEADFRAME MATERIAL: COPPER;
引线框架材料: 铜;
- LEADFRAME THICKNESS: 0.203mm;
引线框架厚度: 0.203mm;
- BOTH PACKAGE LENGTH AND WIDTH DO NOT INCLUDE MOLD FLASH;
塑封体长度及宽度尺寸不包括塑封溢胶;
- REFERENCE: JEDEC MS-013, MS-012.
参考标准: JEDEC MS-013, MS-012.

SCALE	UNIT	mm	TITLE
DATE	2025-06-25		SOP16L产品成型图
DESIGNER	CHECKER	APPROVER	
张金萍			DWG.NO. MT-PD-038
2025-06-25			VERSION C 第1页 共1页